

HOLLAND LIFT

TOGETHER TOWARDS GREATER HEIGHTS

Together towards
greater heights

OPTIONS	HL-240 D/E 25 RT	HL-240 E13
Controlbox with quick disconnect	●	●
Hourmeter	●	●
230V supply on platform	○	○
Driving at full height	●	●
Raise/Lower proportional	●	●
Differential lock	●	--
Four wheel steering (4WDS)	--	○
Steering 90°	●	--
Four wheel drive oscillating axle	●	--
Levelling jacks (N)	●	○
LED illumination package (8 x)	○	○
Heavy duty battery (E)	●	●
Low maintenance	●	●

SAFETY FEATURES

Safety fence	○	○
Flashing beacons	●	●
Drive alarm	●	●
Emergency descent	●	●

APPLICATION

Indoors	●	●
Outdoors	●	○
Temperature range	-15°C/40°C	-15°C/40°C

● = Standard ○ = Option -- = N/A



Website




Instagram



Facebook



LinkedIn

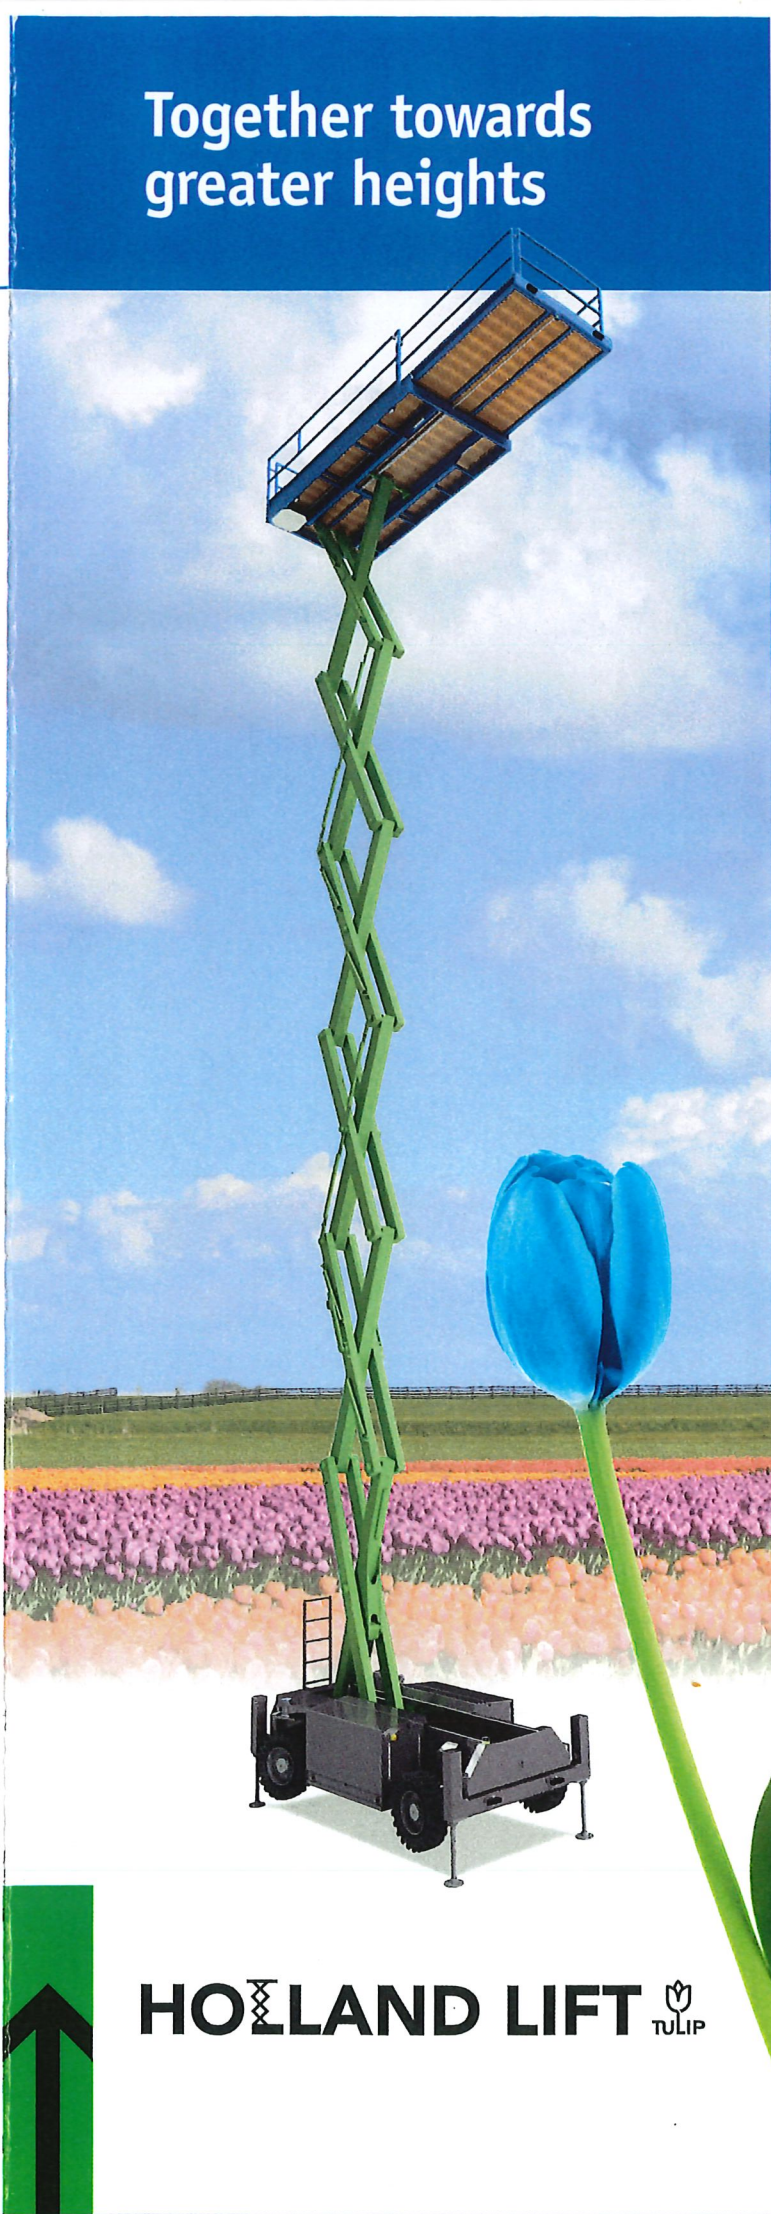

HOLLAND LIFT 

Holland Lift International bv

t: +31 (0) 229 285 555

e: info@hollandlift.com

www.hollandlift.com

